


Specifications

1. Model Number	:	GSLF1201
2. Electrical		
2.1 . Center Frequency (Fo)	:	21.400 MHz
2.2 . Passband Width @ - 3 db	:	+/- 500 KHz min
2.3 . Stopband Width @ - 60 db	:	+/- 2000 KHz max
2.4 . Ripple	:	1.0 db max
2.5 . Insertion loss	:	6.0 db max
2.6 . Ultimate Attenuation	:	70 db max
2.7 . Impedance Zin=Zout	:	50 Ω
2.8 . Return Loss at Fo +/- 500 KHz	:	12.7 min
3. Operating Temperature	:	- 20 $^{\circ}$ C to +75 $^{\circ}$ C

Mechanical Drawing

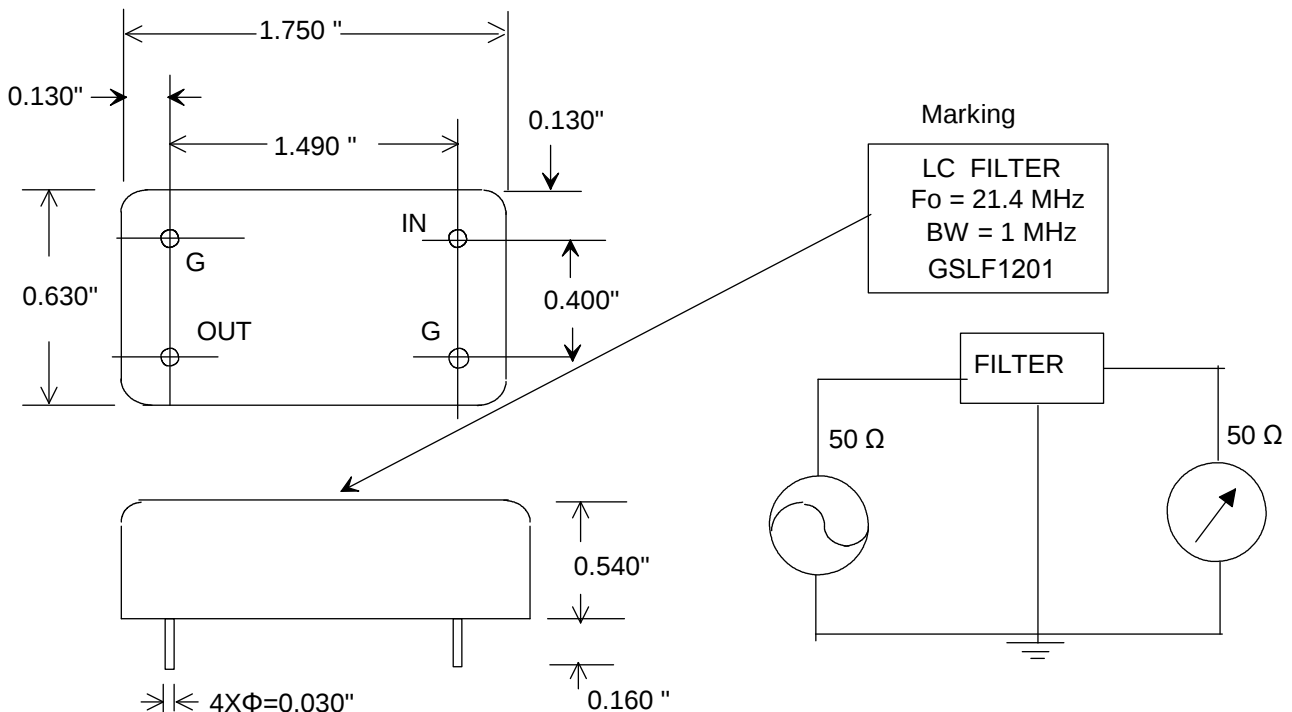

Dimensions : inch