

Maximum Rating


1. Input Power Level: 10 dBm
2. DC voltage: 10 V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -30°C to +85°C

Electrical Characteristics


Item	Min.	Typ.	Max.	Note
Center frequency F_c (MHz)	38.812	38.912	39.012	
Insertion Loss				

Frequency Characteristics


1. Group delay:

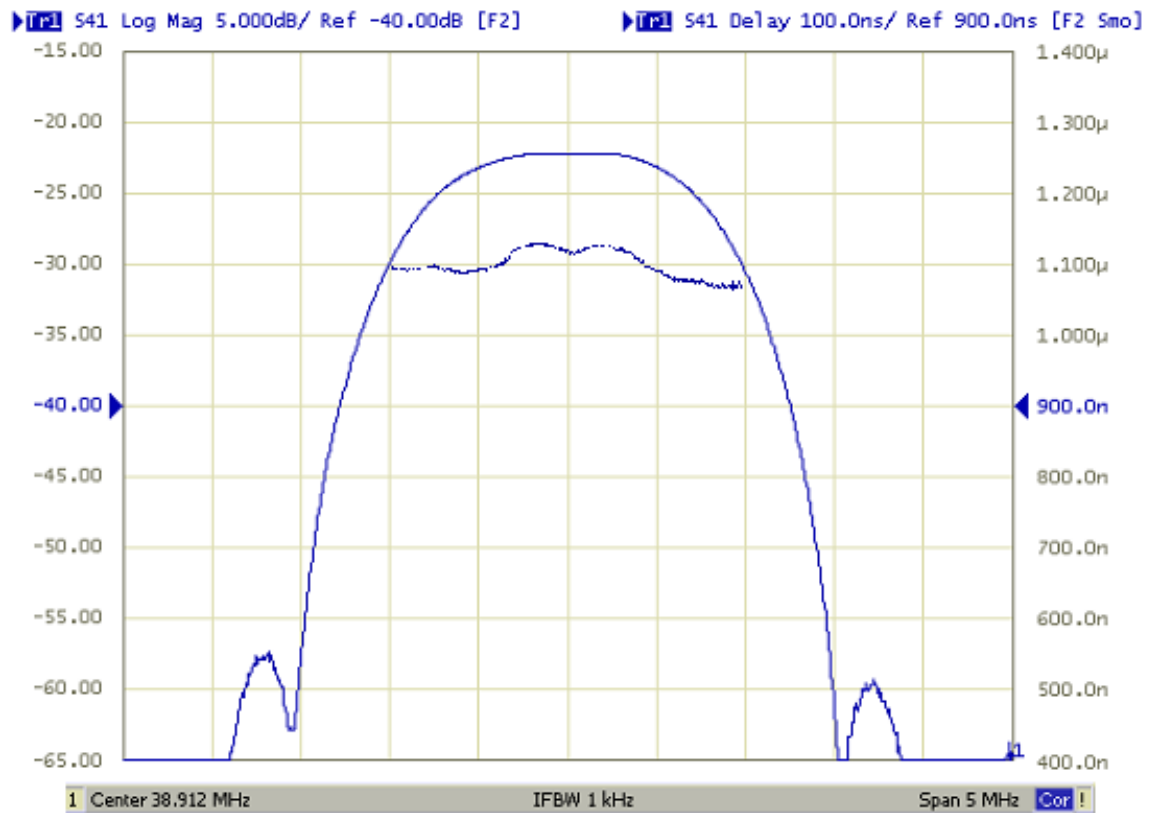

2. S21 Response:

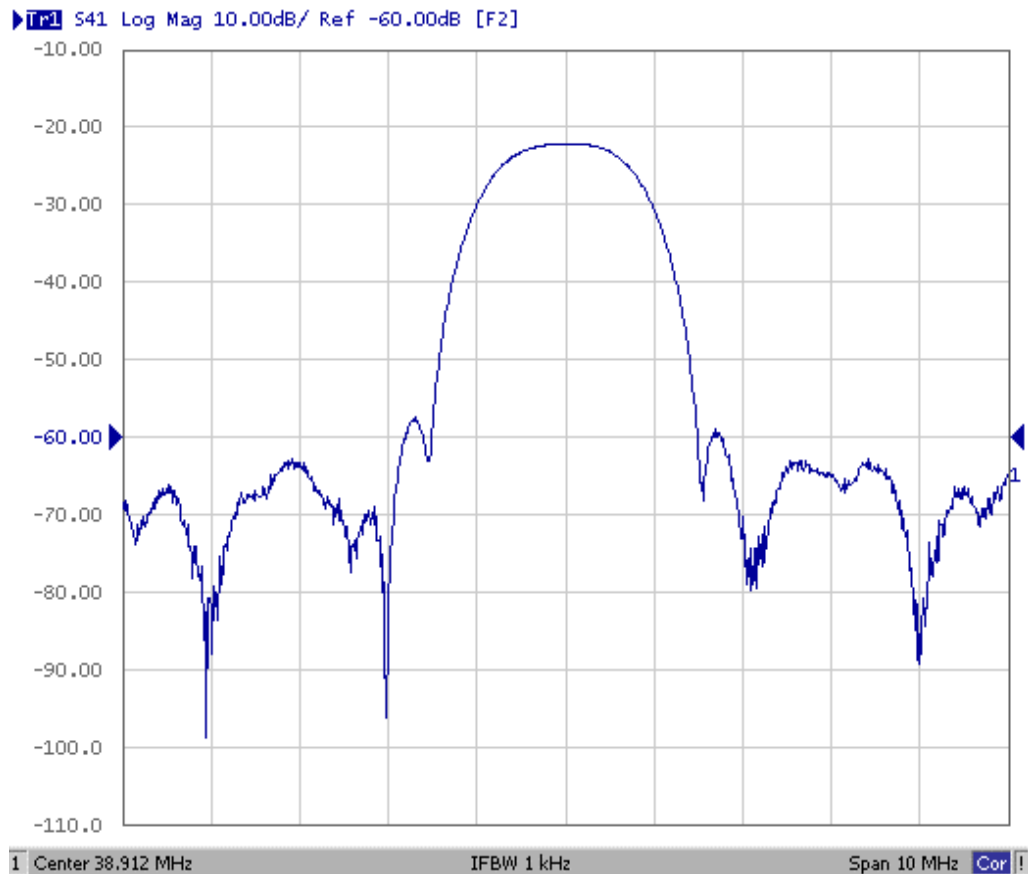


Measurement Circuit

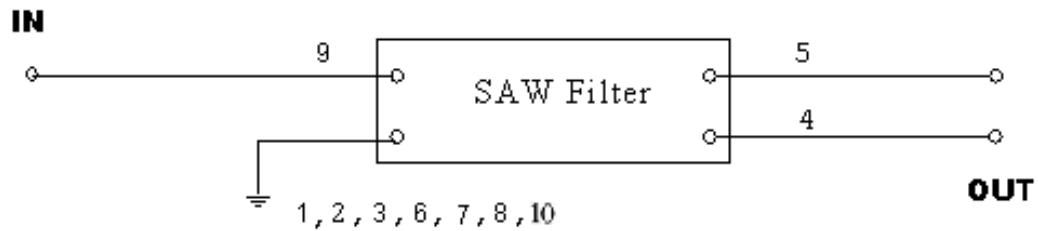


In/out Impedance = 50Ω / 50Ω

Outline Drawing

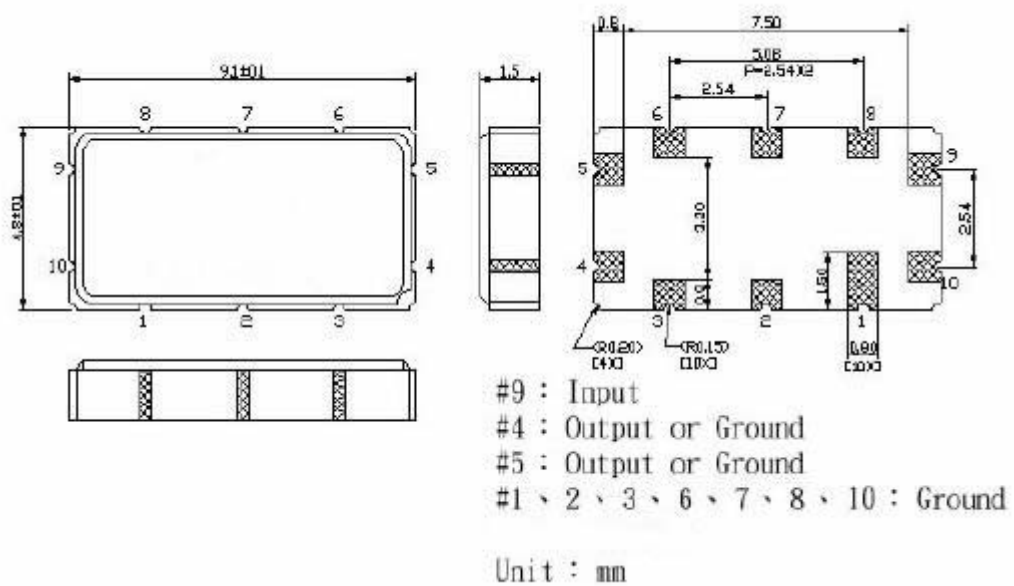


PCB FootPrint

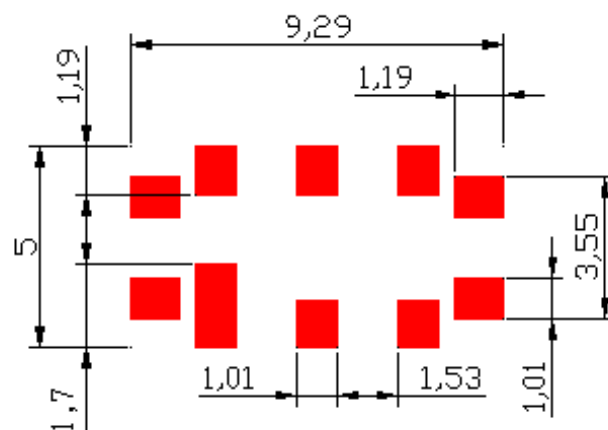

Packing

1. REEL DIMENSION

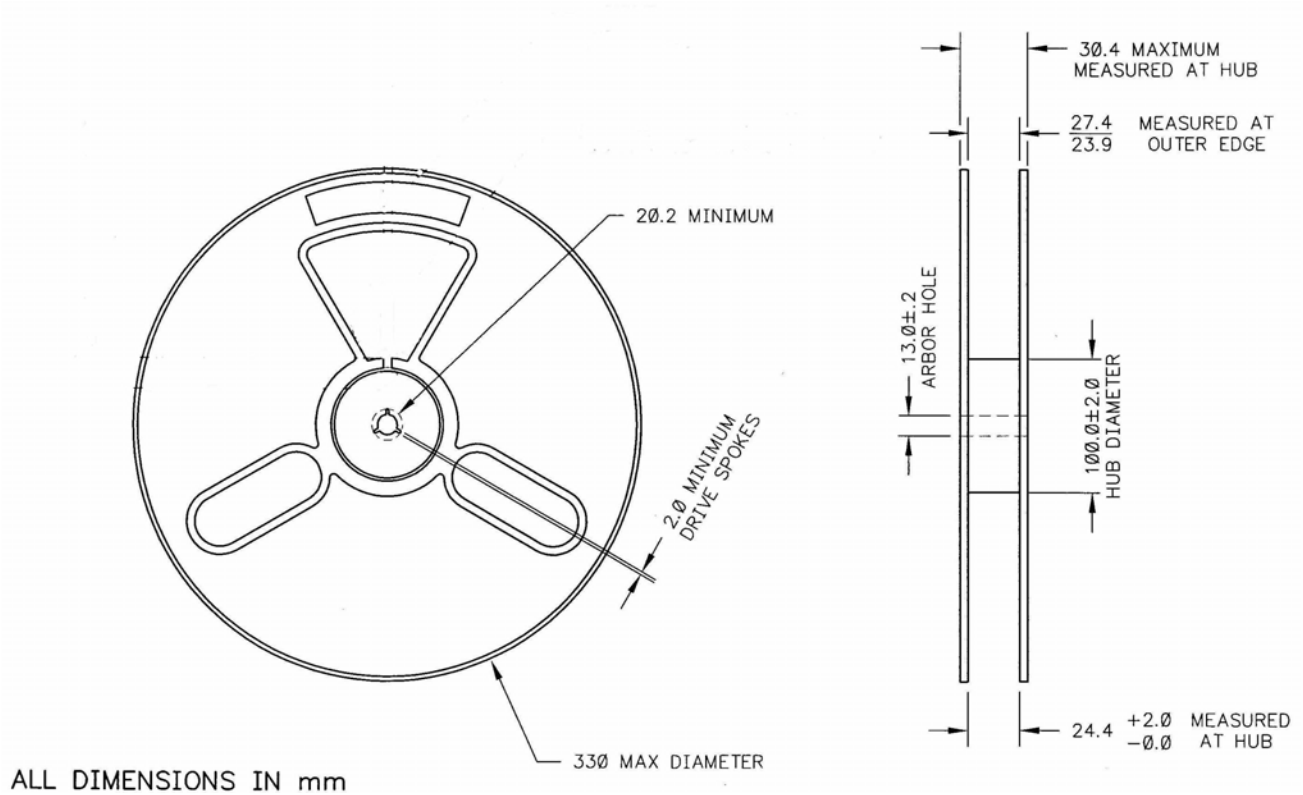

2. TAPE DIMENSION

